



# FLEXIDRAG

## Premium Irrigation Layflat Hose




**FLEXIDRAG®** is a high-quality linear move and travelling irrigator hose. It is manufactured by weaving a textile reinforcement of high-tensile polyester and encasing it with abrasion-resistant polyurethane. Our technically-advanced annealing process gives the finishing treatment to this layflat hose, making it world's best standard. **FLEXIDRAG®** is able to withstand high pressures on water guns as well as remain flexible at low pressures on linear irrigators.

Proudly manufactured in Australia by Crusader Hose, **FLEXIDRAG®** is made to remain flexible at low pressures. It has a tight bend radius and can withstand extremely high UV conditions.

### World's Best Quality

- ✓ Suitable for laterals or winch irrigation
- ✓ Ultra-flexible
- ✓ UV stabilised
- ✓ Quality tested
- ✓ Fully backed up by warranty

**FLEXIDRAG®** is made in a large range of diameters from 40mm to 152mm and is available in continuous lengths of up to 350m. Each roll is fully tested at our factory prior to despatch to your farm. To protect your investment, **FLEXIDRAG®** is covered by a 10-year pro-rata warranty.

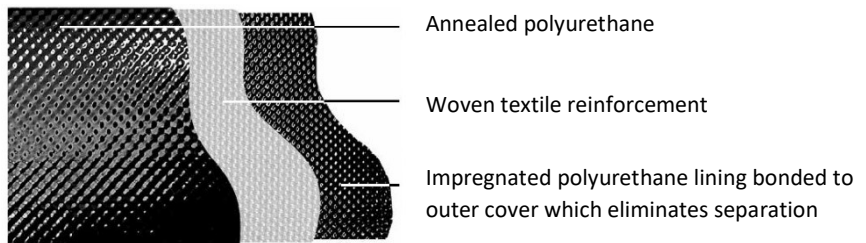

### Ideal for:

- Laterals, Linear, Boom & Travelling Irrigators
- Winch Irrigation
- Effluent Pumping
- Feed Hose to Pivot
- Farm Use

Inside Diameter (mm)	Inside Diameter (inch)	Working Pressure (bar)	Burst Pressure (bar)	Burst Pressure (psi)	Bend Radius @ 30 psi (m)	Tensile Load Tonnes	Avg. Single Wall Thickness (mm)	Weight per metre (kg)
40	1.5"	20	40	580	0.6	4	2.2	0.50
51	2"	20	40	580	0.6	4.5	2.4	0.60
64	2.5"	20	40	580	0.7	4	2.6	0.65
76	3"	20	40	580	0.8	4.5	2.7	0.80
90	3.5"	20	40	580	0.9	6	2.8	0.95
102	4"	20	40	580	1.1	7	3.2	1.00
114	4.5"	17	35	507	1.3	9	3.4	1.30
127	5"	17	35	507	1.5	12	3.6	1.50
152	6"	17	35	507	1.7	14	4.0	1.80

